

# SINOVO



No front and rear enclosures  
for easy installation and easy modular integration



## N Series SmartLink HMI

### 10 Highlights

Enable simple connection between HMI, mobile phone, tablet, computer,TV,camera and other HMIs in local area network.

Enable simple connection between HMI, mobile phone, tablet, computer,TV, camera and other HMIs over the Internet.

Allow remote access for multiple concurrent users without SCADA in the cloud or VNC connection.

Provide data transmission and data storage in any public or private server.

Integrate data with ERP, MES or other applications by MQTT, OPC UA, HTTP,TCP and etc.

Embed the display of HMI in other applications like software, APP and etc.

Include intelligent functions such as TTS output, intercom, audio playing and etc.

Use mobile phone as a scanner to scan barcode and enter information in HMI.

Apply to data visualization or centralized control on large screen by TVBOX.

Use innovative design including HD screen, design without shell and eSIM.

## Model List

| Model  | TFT Screen        | Storage | LAN+COM | USB | Voice | WiFi | Wireless       | Hole Size | Dimension W*H*D |
|--------|-------------------|---------|---------|-----|-------|------|----------------|-----------|-----------------|
| N4     | 4.3" 800*480 HD   | 4G+512M | 1+2     | 1   | Yes   |      | China 4G       | 108x70mm  | 125x78x32mm     |
| N4-G   |                   | 4G+512M | 1+2     | 1   | Yes   |      |                |           |                 |
| N4-W   |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  |                |           |                 |
| N4-E   |                   | 4G+512M | 1+2     | 1   | Yes   |      | Global 4G      |           |                 |
| N7     | 7" 1024*600 HD    | 4G+512M | 1+2     | 1   | Yes   |      | *Built in eSIM | 168x103mm | 184x118x24mm    |
| N7-G   |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  |                |           |                 |
| N7-W   |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  | *Built in eSIM |           |                 |
| N7-GW  |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  |                |           |                 |
| N10    | 10.1" 1024*600 HD | 4G+512M | 1+2     | 1   | Yes   |      | *Built in eSIM | 238x146mm | 248x160x23mm    |
| N10-G  |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  |                |           |                 |
| N10-W  |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  |                |           |                 |
| N10-GW |                   | 4G+512M | 1+2     | 1   | Yes   | Yes  | *Built in eSIM |           |                 |

## Products Features


**Connection in LAN**  
All models have built-in IIoT technology which enables local access and open interface without internet.



**Remote access**  
With the real-time control solution developed by Sinovo, concurrent users can remotely access gateway by APP and desktop.




**Cloud maintenance**  
It's easier for manufacturers to manage equipments by using remote maintenance function.

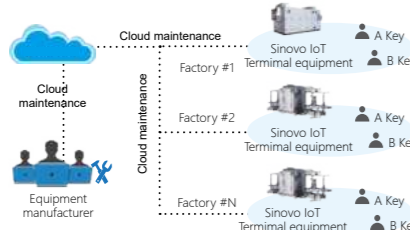

**Secure access**  
The remote access needs to be identified by the A/B key security mechanism. The remote control can be configured to be authorized on gateway.




**Data security**  
The user data is not stored in Sinovo cloud. All the data can be stored in private or public server assigned by users.



**Web API**  
Users can get the data and control device on their own platform or software by Web API in local area network or over Internet.



**MQTT protocol**  
MQTT protocol is supported and applied to the connection with ERP/MES/database.

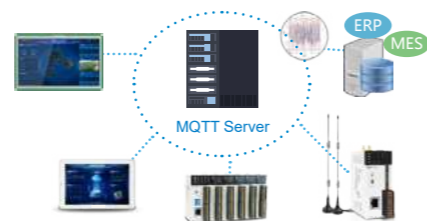


**IoT platform**  
All models support the connection to Alibaba Cloud IoT, AWS IoT and Google Cloud IoT Core.



**Digital display board**  
The production data, device state and video surveillance can be viewed on large screen by connecting with TVBOX. It can be applied to data visualization and centralized control.



**Remote centralized control**  
All the data of remote devices can be acquired through MQTT broker for centralized control. Users don't even need to deploy server if using cloud data center.

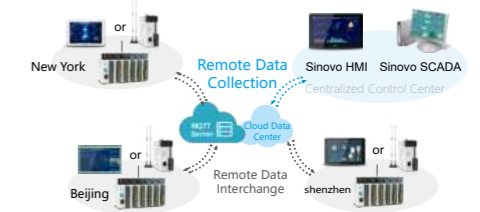

**Text to speech**  
The english text can be converted into voice through built-in speaker. Audio files can also be played.




Support text to speech



Support voice broadcast




Support voice intercom

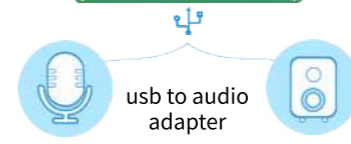

Support remote intercom and broadcast with mobile phone



**Display integration**  
The display of gateway can be embedded in other applications such as software, website, APP and etc so that they have remote access to gateway.

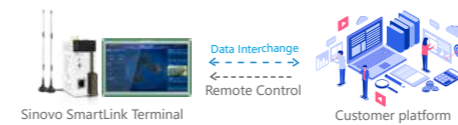

**Mobile scanner**  
You can turn your mobile phone into a barcode scanner and enter information everywhere. It's more convenient than external scanner.



## 规格参数

| 规格参数        |                             | N4"  | N7"          | N10"         |
|-------------|-----------------------------|--|--------------|--------------|
| Software    | Programming software        | Sinovo Cloud SCADA   |              |              |
| Display     | Screen size                 | 4.3" TFT   | 7" TFT       | 10.1" TFT    |
|             | Resolution                  | 800x480 pixels   |              |              |
|             | Color                       | 16.7M  |              |              |
|             | Brightness                  | 450 cd/m2  |              |              |
|             | Viewing angle               | 80°/80°/80°/80°  |              |              |
| Backlight   | Touch panel type            | Analog resistive film  |              |              |
|             | Type                        | LED  |              |              |
|             | Life                        | 50,000 hours   |              |              |
| Hardware    | Auto sleep function         | Yes  |              |              |
|             | Flash                       | 4GB  |              |              |
|             | RAM                         | 512M   |              |              |
|             | Ethernet port               | 10/100 Base-T*1  |              |              |
|             | Serial port                 | COM1:RS232*1 COM2:RS485*1  |              |              |
| Power       | USB HOST                    | USB2.0 *1  |              |              |
|             | RTC                         | Yes  |              |              |
|             | Rated input power           | 24V DC±20%   |              |              |
|             | Power consumption           | 6W@24V DC  | 7.5W@24V DC  | 9W@24V DC    |
|             | Power protection            | Surge protection and anti-reverse protection                               |              |              |
| Environment | Withstand voltage           | 500VAC   |              |              |
|             | Insulation resistance       | 50MΩ @500VDC or more   |              |              |
|             | Vibration resistance        | 10 - 25Hz: 2G/30 minutes in each of X,Y or Z direction                     |              |              |
|             | Cooling method              | Natural air circulation  |              |              |
|             | Storage temperature         | -20 ~ 70°C   |              |              |
| Structure   | Operating temperature       | -10°C ~ 60°C   |              |              |
|             | Relative humidity           | 10 ~ 90% RH (non-condensing)   |              |              |
|             | Operating environment       | Prevention of dust, moisture, corrosion, electric shock and external shock |              |              |
|             | External dimensions (WxHxD) | 125x78x32mm  | 184x118x24mm | 248x160x23mm |
|             | Panel cut dimensions (WxH)  | 108x70mm   | 168x103mm    | 238x146mm    |
| Function    | Weight                      | 0.3kg  | 0.45kg       | 0.75kg       |
|             | Installation                | Vacancy fixation   |              |              |
|             | WiFi                        | Optional (802.11b/g/n)   |              |              |
|             | Wireless                    | Optional (4G eSIM)   |              |              |



## **Shenzhen SINOVO Electric Technologies Co., Ltd.**

Headquarter Address: 5th Floor, Building D, Huafeng International Robot  
Industry Park, Xixiang Street, Hangcheng Road, Baoan District, Shenzhen  
City, China

Tel: 400-881-8689

Email: [info@sinovo.cn](mailto:info@sinovo.cn)

Website: [www.sinovo-vfd.com](http://www.sinovo-vfd.com)



The parameters of product are subject to changes without prior notice. (Ver 1 - 202402)