

# SINOVO



PLC with a built-in HMI



SmartLink Gateway



Card-type PLC




## A8 SmartLink PLC

### 10 Highlights

- Support the full function of PLC and gateway.
- Download HMI program in gateway and use mobile phone as a monitor.
- Enable simple connection between gateway, HMI, mobile phone, tablet, computer, TV and camera in local area network.
- Enable simple connection between gateway, HMI, mobile phone, tablet, computer, TV and camera over the Internet.
- Allow remote access for multiple concurrent users without SCADA in the cloud or VNC connection.
- Provide data transmission and data storage in any public or private server.
- Integrate data with ERP, MES or other applications by MQTT, OPC UA, HTTP, TCP and etc.
- Embed the display of HMI in other applications like software, APP and etc.
- Use mobile phone as a scanner to scan barcode and enter information in HMI.
- Apply to data visualization or centralized control on large screen by TVBOX.

## Model List

Model	Storage	Max Exp	I/O	LAN	COM	WIFI	Wireless	Dimension W×H×D(mm)
A8	4G+512M	15	8 DI	1	1+3	Yes		40×95×65
A8-G	4G+512M	15	8 DI	1	1+3	Yes	China 4G	
A8-E	4G+512M	15	8 DI	1	1+3	Yes	Global 4G	

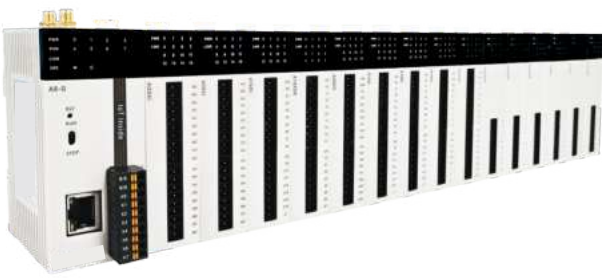


## Features



### All-in-One design

A8 support the full function of PLC and gateway. A8 provides 8 DI and can expand 15 modules.

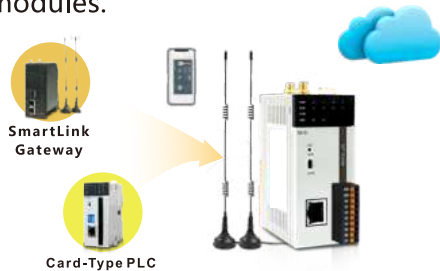

### Use mobile phone as a monitor

Users can use mobile phone, tablet and desktop as a monitor to control gateway.



### Connection in LAN

All models have built-in IIoT technology which enables local access and open interface without internet.



### Remote access


With the real-time control solution developed by Sinovo, concurrent users can remotely access HMI by APP and desktop.





### Cloud maintenance

It's easier for manufacturers to manage equipments by using remote maintenance function.

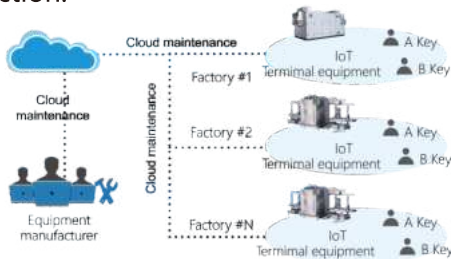

### Secure access

The remote access needs to be identified by the A/B key security mechanism. The remote control can be configured to be authorized on HMI.




### Data security

The user data is not stored in Sinovo cloud. All the data can be stored in private or public server assigned by users.



### MQTT protocol

MQTT protocol is supported and applied to the connection with ERP/MES/database.

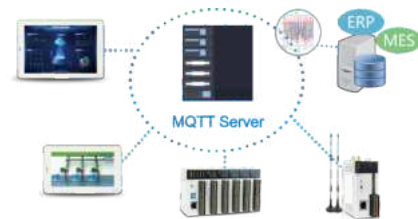


### IoT platform

All models support the connection to Alibaba Cloud IoT, AWS IoT and Google Cloud IoT Core.



### Display integration

The display of HMI can be embedded in other applications such as software, website, APP and etc so that they have remote access to HMI.

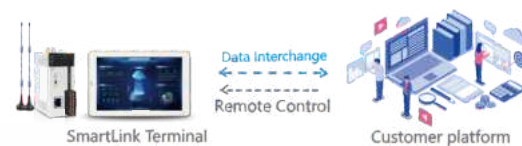


### Remote centralized control

All the data of remote devices can be acquired through MQTT broker for centralized control. Users don't even need to deploy server if using cloud data center.



### Innovative PLC instructions


Users can apply just one instruction to complicated function.






### Simple and effective communication

You can use just one instruction to communicate with any other devices.

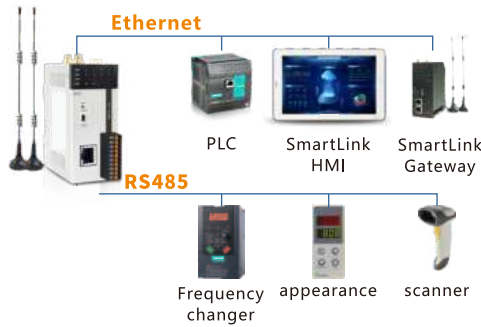

### Digital display board

The production data, device state and video surveillance can be viewed on large screen by connecting with TVBOX. It can be applied to data visualization and centralized control.

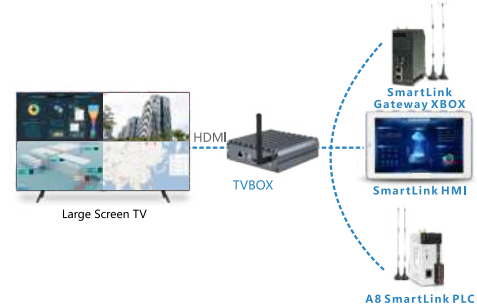



### Mobile scanner

You can turn your mobile phone into a barcode scanner and enter information everywhere. It's more convenient than external scanner.



### Mobile authentication


The identity of operator can be verified by using NFC recognition or scanning a QR code with mobile phone.

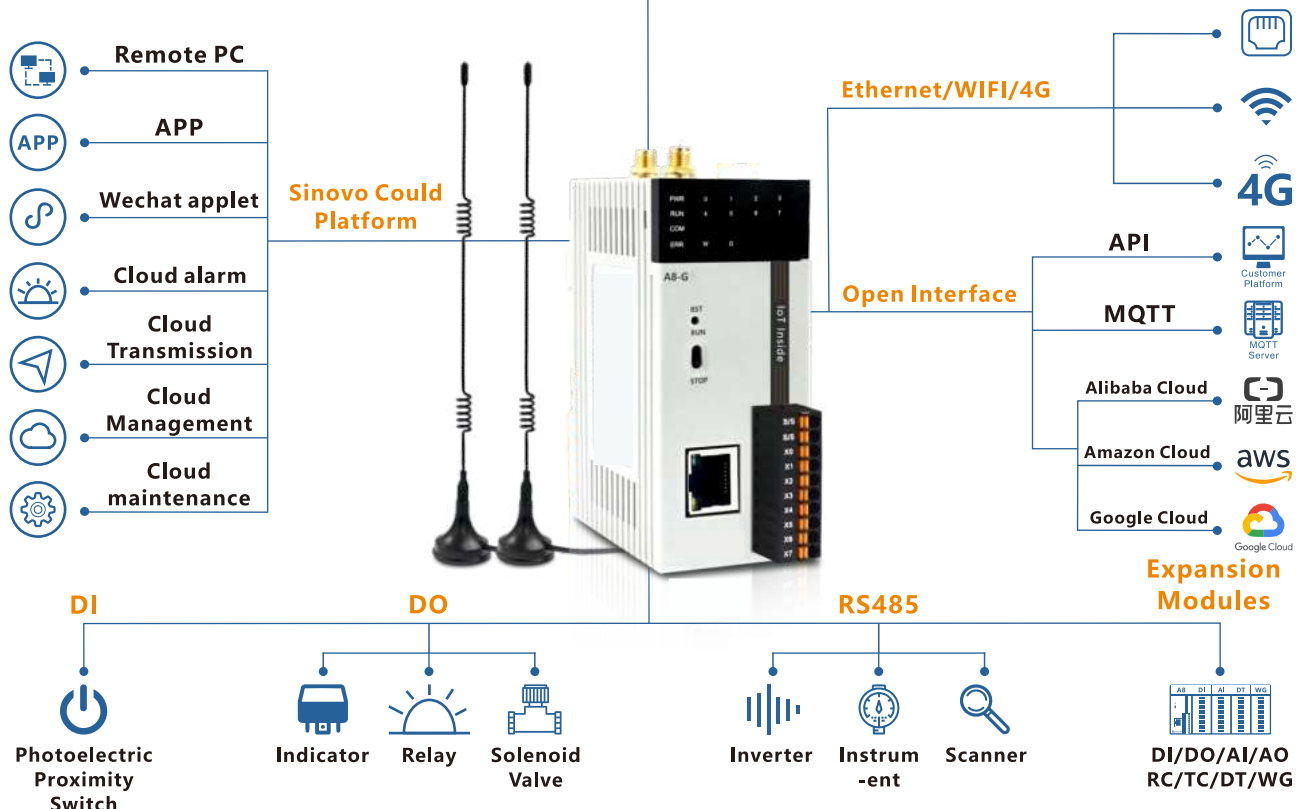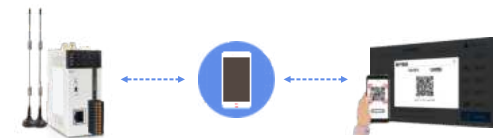

## Specification

Model	A8	A8-G	A8-E	
Software	Programming software	SinovoHappy, Sinovo Cloud SCADA		
PLC parameters	Working mode	Periodic cyclic scanning		
	I/O updating	Update in each scan cycle or immediately		
	Processing speed	0.05μs / instruction		
	Programming language	LD+FBD+IL		
	Program capacity	48K		
	Storage	Permanent storage on Flash ROM without batter		
	Expansion	Support up to 15 modules		
I/O interface	Storage	Flash 4GB, RAM 512MB		
	Serial port	Isolated RS485 port * 1		
	Ethernet port	10/100 Base-T * 1		
	Factory reset	Yes		
	Switch S0	Single pole double throw		
	WIFI	Yes		
	4G	No	China	Global
	SIM port	No	Micro SIM port	
I/O port	8 photoelectric isolated digital inputs			
Power	Rated input power	24VDC±20%		
	Power consumption	< 8W		
	Power protection	Surge protection		
	Withstand voltage	500V AC		
Environment	Temperature & Humidity	Operating temperature: -10~+60°C; Storage temperature: -20~70+°C, Relativehumidity: 10~90%RH (Non-condensing)		
	Vibration resistance	10 - 57Hz: 0.075mm, 1G, 10 times in each of X,Y or Z direction		
	Impact resistance	15G, 11ms, 6 times in each of X,Y or Z direction		
	Insulation resistance	50MΩ @500VDC or more		
	Protection grade	Pass 48-hour salt spray test		
	Cooling method	Natural air circulation		
Structure	External dimensions	40mm*95mm*65mm (W*H*D)		
	Material	ABS and PC (flame-retardant)		

## Dimensional interface description

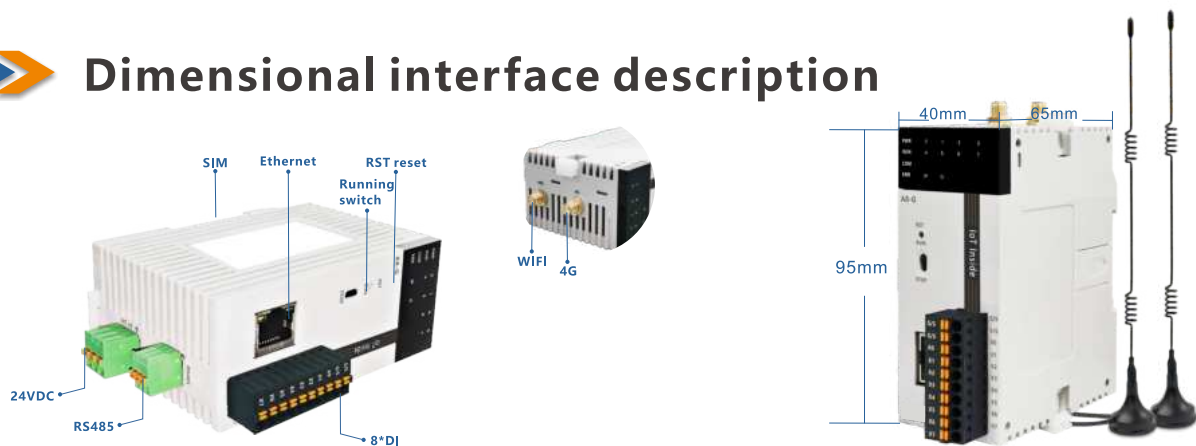



## **Shenzhen SINOVO Electric Technologies Co., Ltd.**

Headquarter Address: 5th Floor, Building D, Huafeng International  
Robot Industry Park, Xixiang Street, Hangcheng Road, Baoan District,  
Shenzhen City, China  
Tel: 400-881-8689  
Email: [info@sinovo.cn](mailto:info@sinovo.cn)  
Website: [www.sinovo-vfd.com](http://www.sinovo-vfd.com)



The parameters of product are subject to changes without prior notice. (Ver I - 202401)